



SERVICE MANUAL

LS-Series Subwoofers

WEB ACCESS: <http://www.yorkville.com>

**WORLD HEADQUARTERS
CANADA**

Yorkville Sound
550 Granite Court
Pickering, Ontario
L1W-3Y8 CANADA

Voice: (905) 837-8481
Fax: (905) 837-8746

U.S.A.

Yorkville Sound Inc.
4625 Witmer Industrial Estate
Niagara Falls, New York
14305 USA

Voice: (716) 297-2920
Fax: (716) 297-3689



Quality and Innovation Since 1963
Printed in Canada

IMPORTANT SAFETY INSTRUCTIONS



INSTRUCTIONS PERTAINING TO A RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

CAUTION:

TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK).

NO USER SERVICEABLE PARTS INSIDE.

REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

INSTRUCTIONS RELATIVES AU RISQUE DE FEU, CHOC ÉLECTRIQUE, OU BLESSURES AUX PERSONNES

AVIS:

AFIN DE REDUIRE LES RISQUE DE CHOC ELECTRIQUE, N'ENLEVEZ PAS LE COUVERT (OU LE PANNEAU ARRIERE)

NE CONTIENT AUCUNE PIECE REPARABLE PAR L'UTILISATEUR.

CONSULTEZ UN TECHNICIEN QUALIFIE POUR L'ENTRETIEN

Read Instructions

The Owner's Manual should be read and understood before operation of your unit. Please, save these instructions for future reference.

Packaging

Keep the box and packaging materials, in case the unit needs to be returned for service.

Warning

When using electric products, basic precautions should always be followed, including the following:

Power Sources

Your unit should be connected to a power source only of the voltage specified in the owners manual or as marked on the unit. This unit has a polarized plug. Do not use with an extension cord or receptacle unless the plug can be fully inserted. Precautions should be taken so that the grounding scheme on the unit is not defeated.

Hazards

Do not place this product on an unstable cart, stand, tripod, bracket or table. The product may fall, causing serious personal injury and serious damage to the product. Use only with cart, stand, tripod, bracket, or table recommended by the manufacturer or sold with the product. Follow the manufacturer's instructions when installing the product and use mounting accessories recommended by the manufacturer.

The apparatus should not be exposed to dripping or splashing water; no objects filled with liquids should be placed on the apparatus.

Terminals marked with the "lightning bolt" are hazardous live; the external wiring connected to these terminals require installation by an instructed person or the use of ready made leads or cords.

Ensure that proper ventilation is provided around the appliance.

No naked flame sources, such as lighted candles, should be placed on the apparatus.

Power Cord

The AC supply cord should be routed so that it is unlikely that it will be damaged. If the AC supply cord is damaged DO NOT OPERATE THE UNIT.

Service

The unit should be serviced only by qualified service personnel.

Veuillez Lire le Manuel

Il contient des informations qui devraient être comprises avant l'opération de votre appareil. Conservez S.V.P. ces instructions pour consultations ultérieures.

Emballage

Conservez la boîte au cas où l'appareil devait être retourné pour réparation.

Attention:

Lors de l'utilisation de produits électriques, assurez-vous d'adhérer à des précautions de bases incluant celle qui suivent:

Alimentation

L'appareil ne doit pas être branché qu'à une source d'alimentation correspondant au voltage spécifié dans le manuel ou tel qu'indiqué sur l'appareil. Cet appareil est équipé d'une prise d'alimentation polarisée. Ne pas utiliser cet appareil avec un cordon de raccordement à moins qu'il soit possible d'insérer complètement les trois lames. Des précautions doivent être prises afin d'éviter que le système de mise à la terre de l'appareil ne soit désengagé.

Risque

Ne pas placer cet appareil sur un chariot, un support, un trépied ou une table instables. L'appareil pourrait tomber et blesser quelqu'un ou subir des dommages importants. Utiliser seulement un chariot, un support, un trépied ou une table recommandés par le fabricant ou vendus avec le produit. Suivre les instructions du fabricant pour installer l'appareil et utiliser les accessoires recommandés par le fabricant.

Il convient de ne pas placer sur l'appareil de sources de flammes nues, telles que des bougies allumées.

L'appareil ne doit pas être exposé à des égouttements d'eau ou des éclaboussures et qu'aucun objet rempli de liquide tel que des vases ne doit être placé sur l'appareil.

Assurez que l'appareil est fourni de la propre ventilation.

Les dispositifs marqués d'une symbole "d'éclair" sont des parties dangereuses au toucher et que les câblages extérieurs connectés à ces dispositifs de connexion extérieure doivent être effectués par un opérateur formé ou en utilisant des cordons déjà préparés.

Cordon d'Alimentation

Évitez d'endommager le cordon d'alimentation. N'UTILISEZ PAS L'APPAREIL si le cordon d'alimentation est endommagé.

Service




Consultez un technicien qualifié pour l'entretien de votre appareil.

AP800 Parts List 12/6/2005

YS #	Description	Qty.	YS #	Description	Qty.	YS #	Description	Qty.	YS #	Description	Qty.
LS608	ADAPTOR, SPEAKER STAND, METAL, BLACK	1	LS808	ADAPTOR, SPEAKER STAND, METAL, BLACK	1	LS1004	RECESSED RUBBER BUMPER WITH WASHER	2	LS1208	RECESSED RUBBER BUMPER WITH WASHER	1
8483	ADAPTOR, SPEAKER STAND, METAL, BLACK	1	8483	ADAPTOR, SPEAKER STAND, METAL, BLACK	1	8545	RECESSED RUBBER BUMPER WITH WASHER	2	8545	RECESSED RUBBER BUMPER WITH WASHER	1
8547	PLASTIC FOOT BLACK, POLYETHYLENE	4	8545	RECESSED RUBBER BUMPER WITH WASHER	2	8562	CORNER, 3 LEGS, BLACK OXIDE	2	8562	CORNER, 3 LEGS, BLACK OXIDE	1
8562	CORNER, 3 LEGS, BLACK OXIDE	4	8562	CORNER, 3 LEGS, BLACK OXIDE	4	8569	CORNER, 2 LEGS NO LIP BLACK OXIDE	4	8569	CORNER, 2 LEGS NO LIP BLACK OXIDE	1
8569	CORNER, 2 LEGS NO LIP BLACK OXIDE	4	8569	CORNER, 2 LEGS NO LIP BLACK OXIDE	2	8579	4000 SERIES RIGID CASTER	2	8579	4000 SERIES RIGID CASTER	1
3924	1/4" JCK PCB MT VERT 2XTIP HICURNT	2	8579	4000 SERIES RIGID CASTER	2	3924	1/4" JCK PCB MT VERT 2XTIP HICURNT	2	3924	1/4" JCK PCB MT VERT 2XTIP HICURNT	1
3628	SPKON 4C PCB MT VERT 250TAB GRY #4	2	3924	1/4" JCK PCB MT VERT 2XTIP HICURNT	2	3628	SPKON 4C PCB MT VERT 250TAB GRY #4	2	3628	SPKON 4C PCB MT VERT 250TAB GRY #4	1
8515	SMALL BLACK XOVERDISH PLASTIC CNFG1	1	3628	SPKON 4C PCB MT VERT 250TAB GRY #4	2	8515	SMALL BLACK XOVERDISH PLASTIC CNFG1	1	8515	SMALL BLACK XOVERDISH PLASTIC CNFG1	1
8565	BAR HANDLE ALL METAL	2	8515	SMALL BLACK XOVERDISH PLASTIC CNFG1	1	8551	BAR HANDLE RIGHT ANGLE TOP LOAD	2	8551	BAR HANDLE RIGHT ANGLE TOP LOAD	1
8604	10-32 T NUT	8	8551	BAR HANDLE RIGHT ANGLE TOP LOAD	1	8565	BAR HANDLE ALL METAL	2	8565	BAR HANDLE ALL METAL	1
8515DS	ALUMINIZED DECAL FOR 8515 SUBS ONLY	1	8565	BAR HANDLE ALL METAL	2	8604	10-32 T NUT	16	8604	10-32 T NUT	1
8259D	"Y" LOGO ELITE SERIES LARGE DOMED	1	8604	10-32 T NUT	8	9897	CABINET COVER, BLACK, 54" WIDE	37.92	3803	NYLON SECUR-A-TACH MINI PLASTIC TIE	1
3543	20 PIN BRKAWAY 90 LOCK .156	0.2	3803	NYLON SECUR-A-TACH MINI PLASTIC TIE	1	3803	NYLON SECUR-A-TACH MINI PLASTIC TIE	1	8515DS	ALUMINIZED DECAL FOR 8515 SUBS ONLY	1
3549	TRIFURCON TERM .156	2	8515DS	ALUMINIZED DECAL FOR 8515 SUBS ONLY	1	8515DS	ALUMINIZED DECAL FOR 8515 SUBS ONLY	1	8259D	"Y" LOGO ELITE SERIES LARGE DOMED	1
3558	TERM HOUSING 4 CIR. .156/RAMP	1	8259D	"Y" LOGO ELITE SERIES LARGE DOMED	1	8259D	"Y" LOGO ELITE SERIES LARGE DOMED	1	3543	20 PIN BRKAWAY 90 LOCK .156	0.2
4597	22AWG STRAN TC WIR JMP	10	3543	20 PIN BRKAWAY 90 LOCK .156	0.2	3543	20 PIN BRKAWAY 90 LOCK .156	0.2	3549	TRIFURCON TERM .156	2
8729	#4 X 3/8 FLAT QUAD TYPE A JS500 BLK	4	3549	TRIFURCON TERM .156	2	3558	TERM HOUSING 4 CIR. .156/RAMP	1	3558	TERM HOUSING 4 CIR. .156/RAMP	1
8801	6-32 X 3/8 PAN PH TAPITTE JS500	2	3558	TERM HOUSING 4 CIR. .156/RAMP	1	8602	1/4-20 T NUT	1	8602	1/4-20 T NUT	1
8811	#6 X 1 1/4 FLAT QDRX WS LR CLEAR ZN	8	4597	22AWG STRAN TC WIR JMP	10	8602	1/4-20 T NUT	10	4597	22AWG STRAN TC WIR JMP	10
8785	#8 X 3/4 OVAL PH TYPE A BLACK OXIDE	6	8729	#4 X 3/8 FLAT QUAD TYPE A JS500 BLK	4	8729	#4 X 3/8 FLAT QUAD TYPE A JS500 BLK	4	8729	#4 X 3/8 FLAT QUAD TYPE A JS500 BLK	4
8815	8-32 X 3/4 PAN PH TAPITTE JS500	4	8801	6-32 X 3/8 PAN PH TAPITTE JS500	2	8729	#4 X 3/8 FLAT QUAD TYPE A JS500 BLK	4	8801	6-32 X 3/8 PAN PH TAPITTE JS500	2
8756	#10 X 3/4 PAN PH TYPE A BLACK OXIDE	40	8785	#8 X 3/4 OVAL PH TYPE A BLACK OXIDE	6	8801	6-32 X 3/8 PAN PH TAPITTE JS500	2	8811	#8 X 1 1/4 FLAT QDRX WS LR CLEAR ZN	32
8781	#10 X 7/8 FLAT PHIL TYPE A JS500BLK	4	8815	8-32 X 3/4 PAN PH TAPITTE JS500	4	8811	#6 X 1 1/4 FLAT QDRX WS LR CLEAR ZN	32	8785	#8 X 3/4 OVAL PH TYPE A BLACK OXIDE	11
8786	10-32 X 1 1/4 PAN QD MS JS500 BLACK	8	8756	#10 X 3/4 PAN PH TYPE A BLACK OXIDE	46	8785	#8 X 3/4 PAN PH TAPITTE JS500	4	8815	8-32 X 3/4 PAN PH TAPITTE JS500	11
8777	#14 X 1FLAT PH TYPE A JS500 M6 HEAD	4	8786	10-32 X 1 1/4 PAN QD MS JS500 BLACK	8	8815	8-32 X 3/4 PAN PH TAPITTE JS500	4	8756	#10 X 3/4 PAN PH TYPE A BLACK OXIDE	58
8928	#14X11/4 ALLEN FLHD WOOD SCRW JS500	6	8777	#14 X 1FLAT PH TYPE A JS500 M6 HEAD	4	8756	#10 X 3/4 PAN PH TYPE A BLACK OXIDE	58	8756	#10 X 3/4 PAN PH TYPE A BLACK OXIDE	58
7458	18" 4R 800WPGM SPEAKER	1	8928	#14X11/4 ALLEN FLHD WOOD SCRW JS500	8	8786	10-32 X 1 1/4 PAN QD MS JS500 BLACK	16	8786	10-32 X 1 1/4 PAN QD MS JS500 BLACK	16
8820	#8 FLAT WASHER JS500	8	8770	14-20 X 1 5/16 TRUSS PH MS JS500	10	8928	#14X11/4 ALLEN FLHD WOOD SCRW JS500	8	8928	#14X11/4 ALLEN FLHD WOOD SCRW JS500	8
3424	DPDT SLID SW PCMT H GOLD CONTACTS	1	7458	18" 4R 800WPGM SPEAKER	1	8770	14-20 X 1 5/16 TRUSS PH MS JS500	10	8846	1/4-20 X 1 3/4 FLAT PH MS JS500	10
		3424	DPDT SLID SW PCMT H GOLD CONTACTS	1	7458	18" 4R 800WPGM SPEAKER	2	8770	1/4-20 X 1 5/16 TRUSS PH MS JS500	2	
		3424	DPDT SLID SW PCMT H GOLD CONTACTS	1	7458	18" 4R 800WPGM SPEAKER	2	7460	18" 4R1200WPGM SPEAKER DCR3.9R	1	
		3424	DPDT SLID SW PCMT H GOLD CONTACTS	1	7460	18" 4R1200WPGM SPEAKER DCR3.9R	1	3424	DPDT SLID SW PCMT H GOLD CONTACTS	1	




LS608 élite Subwoofer

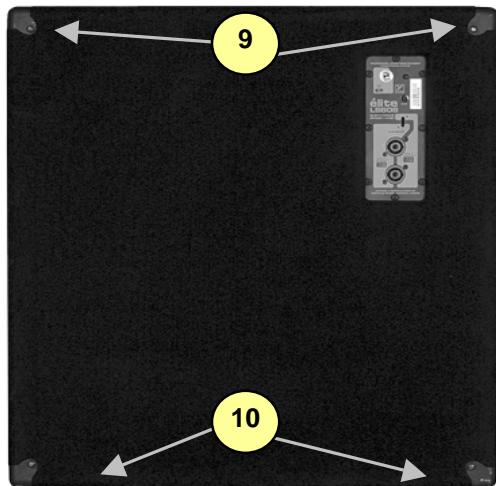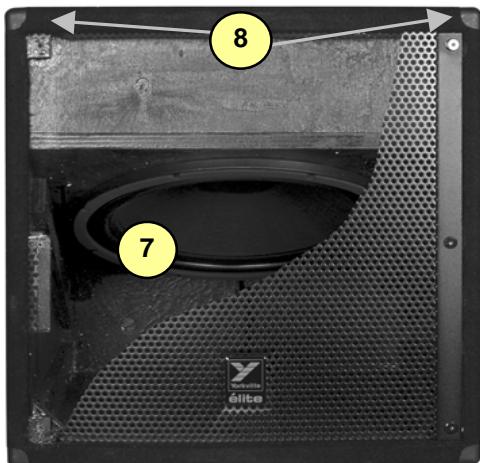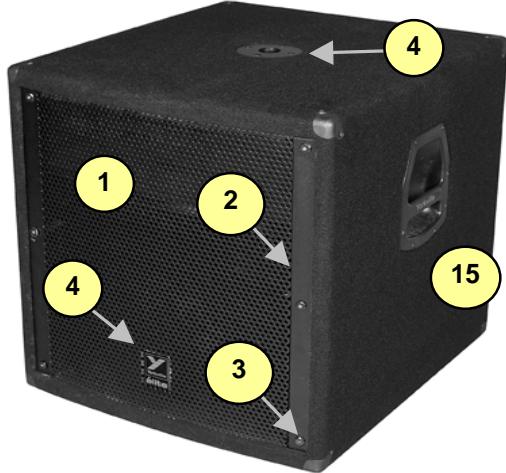

#	Part#	Description
Labeled Components		
1	Z388	LS608 GRILL
2	Z391	LS608 GRILL BAR
3	8929	#14X11/4 ALLEN FLHD WOOD SCRW J
4	8259D	"Y" LOGO ELITE SERIES LARGE DOMED
5	8483	ADAPTER, SPEAKER STAND, METAL, BLACK
6	8565	BAR HANDLE ALL METAL
7	18/029Y4M	18" 8R 800WPGM SPEAKER
8	8569	CORNER, 2 LEGS NO LIP BLACK OXIDE
9	8562	CORNER, 3 LEGS BLACK OXIDE
10	8547	PLASTIC FOOT BLACK, POLYETHYLEN
11	3924	1/4" JCK PCB MT VERT 2XTIP
12	2419	5.00 AMP CIRCUIT BREAKER PC MOUNT
13	3424	DPDT SLID SW PCMT H GOLD CONTAC
14	3628	SPKON 4C PCB MT VERT 250TAB GRY
15	8536	POCKET HANDLE, PLASTIC, TEARDROP (OLD)
16		
17		
18		
19		
20		
21		
22		

Note: Current model does NOT use a circuit breaker

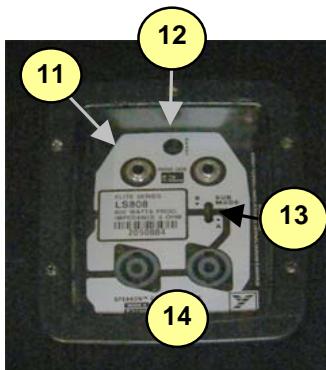


*NOTE: Replacement grills and supports are 'Special-Order' and are only available while the model is in production.

**Real Gear.
Real People.**



LS808



élite Subwoofer

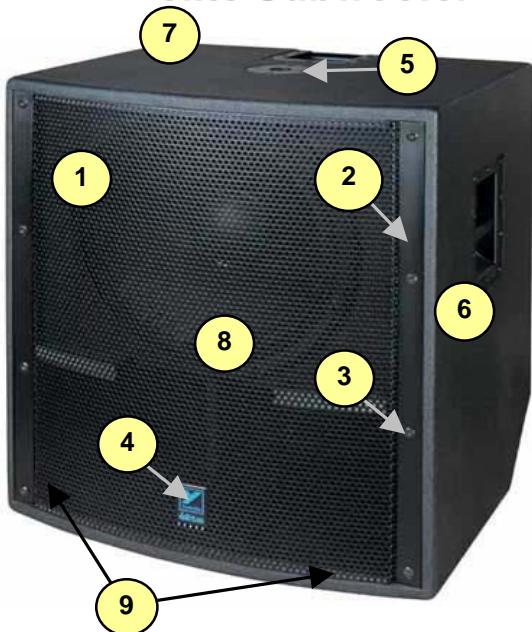

#	Part#	Description
Labeled Components		
1	Z605	LS808 GRILL
2	Z606	LS808 GRILL BAR
3	8929	#14X11/4 ALLEN FLHD WOOD SCRW J
4	8259D	"Y" LOGO ELITE SERIES LARGE DOMED
5	8483	ADAPTER, SPEAKER STAND, METAL, BLACK
6	8565	BAR HANDLE ALL METAL
7	8551	BAR HANDLE RIGHT ANGLE TOP LOAD
8	18/029Y4M	18" 8R 800WPGM SPEAKER
9	8569	CORNER, 2 LEGS NO LIP BLACK OXIDE
10	8562	CORNER, 3 LEGS BLACK OXIDE
11	8545	RECESSED RUBBER BUMPER WITH WASHER
12	8579	4000 SERIES RIGID CASTER 822
13	8551	BAR HANDLE RIGHT ANGLE TOP LOAD
14	3924	1/4" JCK PCB MT VERT 2XTIP
15	2419*	5.00 AMP CIRCUIT BREAKER PC MOUNT
16	3424	DPDT SLID SW PCMT H GOLD CONTAC
17	3628	SPKON 4C PCB MT VERT 250TAB GRY
18	8545**	RECESSED RUBBER BUMPER WITH WASHER
19		
20		
21		
22		

* Note: Current model does NOT use a circuit breaker

** Rubber feet used on 'wheeled' version

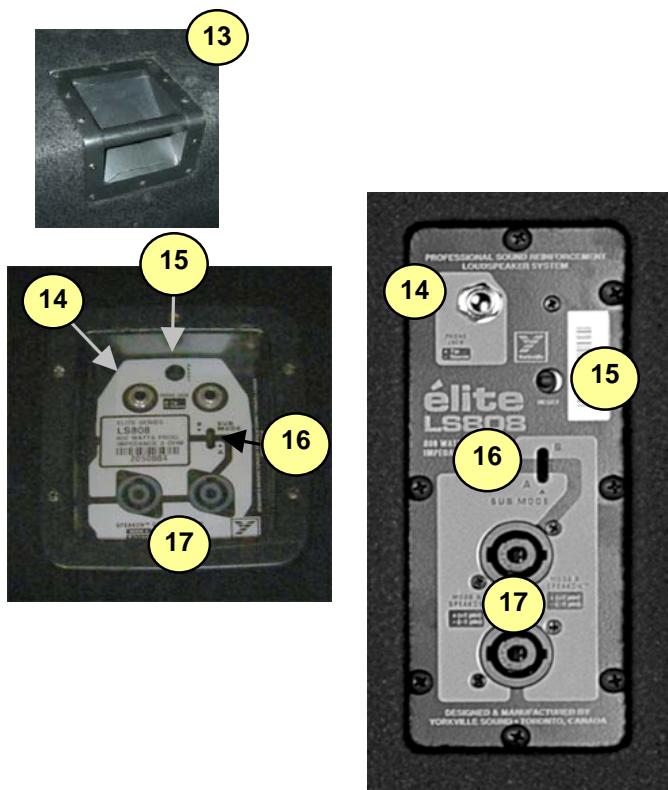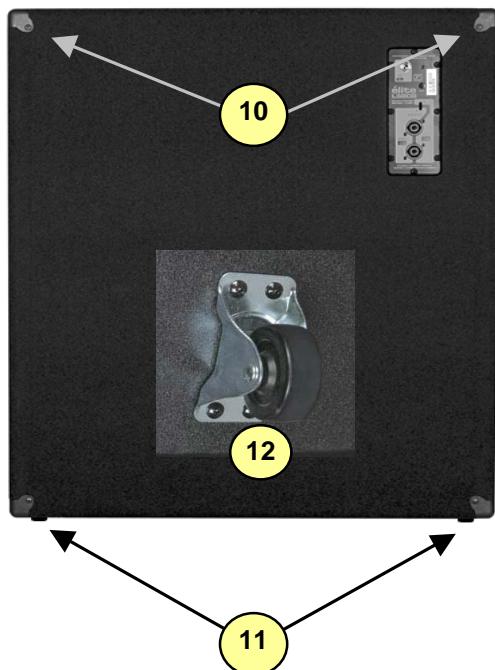


*NOTE: Replacement grills and supports are 'Special-Order' and are only available while the model is in production.



**Real Gear.
Real People.**

SPEAKER LIST:

LS1004 #7458 18" 8R 800WPGM (2 IN PARALLEL)
LS1208 #7469 18" 4R 1200WPGM
LS608 #7458 18" 8R 800WPGM
LS808 #7465 18" 8R 1200WPGM
LS908 #7458 18" 8R 800WPGM
TS18H PS46Y8M 18" 8R 600WPGM

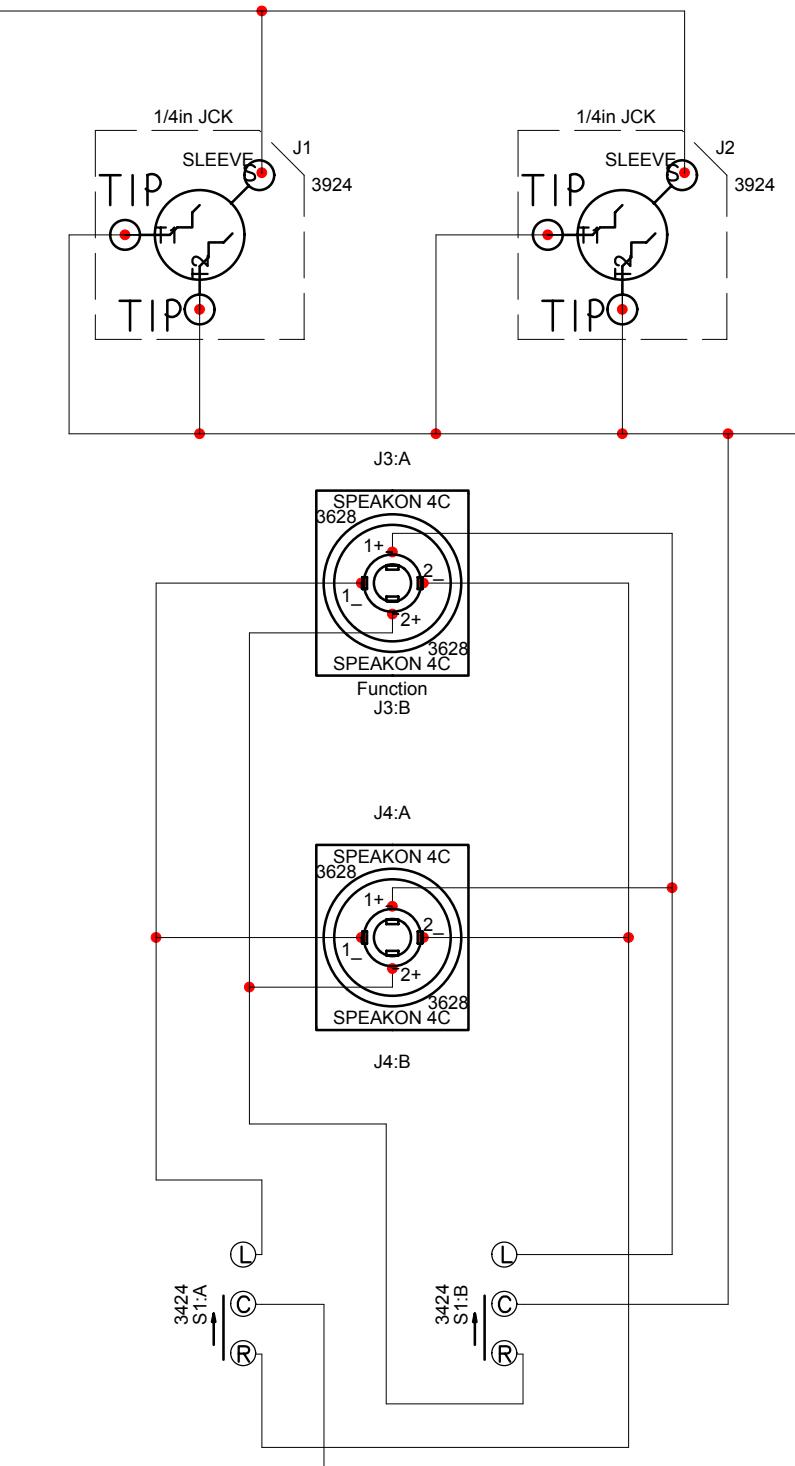

NOTE: SP2 IS USED ON LS1004 ONLY



M593.PCB_DATABASE_HISTORY

MODEL(S):- LS SERIES SUB-WOOFERS			
#	DATE	VER#	DESCRIPTION OF CHANGE
1	NOV/2000	1.00	UPDATED FOR SMALL DISH (M528 TO m593)
2	JUN 27 01	2.00	MODIFIED FOR 6.5A BREAKER
3	SEP 20 01	3.00	JUMPERS MOVED AWAY FROM JACK
4	APR 22 03	4.00	REMOVE BREAKER (UPDATE TO PCAD2002)
5	FEB/10/05	5.00	PC#6810. REDO SOLDERMASK (PCBM REQUEST)
6	JUN/15/05	.	PC#6929 SPEAKER 18/029Y4M TO #7458
7			PC#6930 SPEAKER 18/063Y4M TO #7460
8	AUG-24-2005	6.00	PC#6936:GT:ADDED ROUTEGAUGE,TARGETS,ETCH
9	FEB-23-2006	6.10	PC#7082:GT:UPDATE #3543 HOLE SIZES
10	MAY-01-2006	.	PC#7084:GT:LS1208 SPKR #7460->#7469
11	D	V	N
12	D	V	N
13	D	V	N




Product **LS1004/1208/608/808/908**
 LS SERIES SUBWOOFER PCB# M593 Sheet 1 of 2
 Date: Mon May 01, 2006 Rev: V6.10
 Filename: m593-LS-sub-woofers-6v10.sch2002

M593 DRILL HISTORY


MODEL(S):- LS SERIES SUB-WOOFERS

#	DATE	VER#	DESCRIPTION OF CHANGE
1	MAY-13-2003	V07	N
2	AUG-30-2005	V08	PC#6936:CHANGES FOR V6.00 (SEE HISTORY BOX)
3	FEB-23-2006	V09	PC#7082:GT:UPDATE #3543 HOLE SIZES
4	D	V	N
5	D	V	N
6	D	V	N

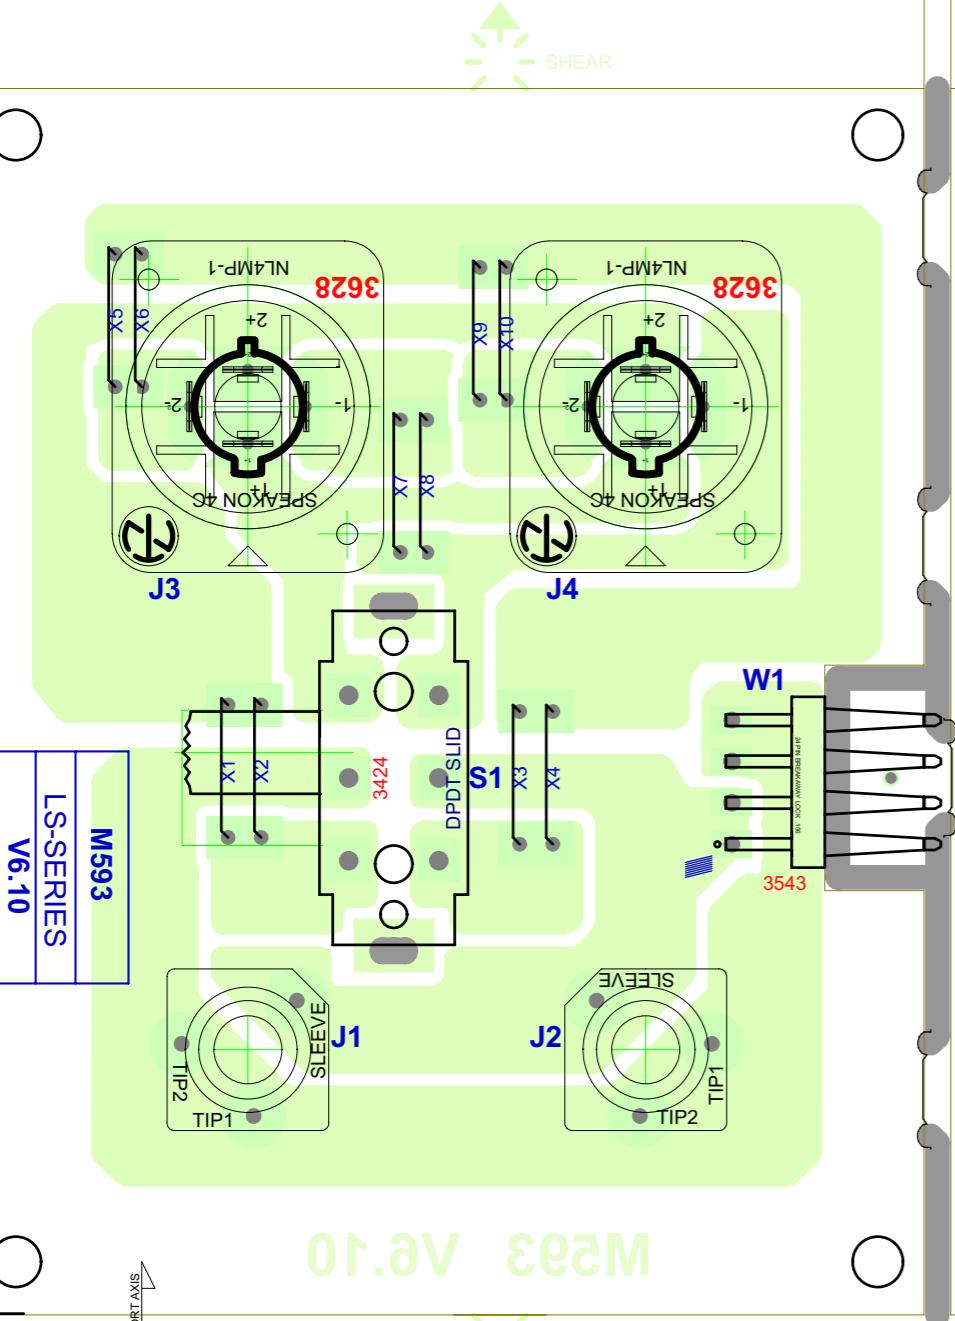

SPEAKER LIST:

LS1004 #7458 18" 8R 800WPGM (2 IN PARALLEL)
 LS1208 #7460 18" 4R 1200WPGM
 LS608 #7458 18" 8R 800WPGM
 LS808 #7465 18" 8R 1200WPGM
 LS908 #7458 18" 8R 800WPGM
 TS18H PS46Y8M 18" 8R 600WPGM

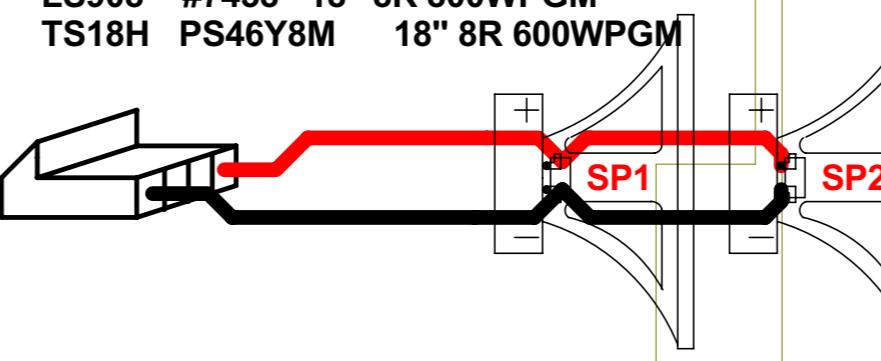

NOTE: SP2 IS USED ON LS1004 ONLY

M593 HISTORY

MODEL(S):- LS SERIES SUB-WOOFERS

#	DATE	VER#	DESCRIPTION OF CHANGE
1	NOV/2000	1.00	UPDATED FOR SMALL DISH (M528 TO m593)
2	JUN 27 01	2.00	MODIFIED FOR 6.5A BREAKER
3	SEP 20 01	3.00	JUMPERS MOVED AWAY FROM JACK
4	APR 22 03	4.00	REMOVE BREAKER (UPDATE TO PCAD2002)
5	FEB/10/05	5.00	PC#6810. REDO SOLDERMASK (PCBM REQUEST)
6	JUN/15/05	.	PC#6929 SPEAKER 18/029Y4M TO #7458
7			PC#6930 SPEAKER 18/063Y4M TO #7460
8	AUG-24-2005	6.00	PC#6936:GT:ADDED ROUTEGAUGE,TARGETS,ETCH
9	FEB-23-2006	6.10	PC#7082:GT:UPDATE #3543 HOLE SIZES
10	MAY-01-2006	V	PC#7084:GT:LS1208 SPKR #7460->#7469
11	D	N	
12	D	V	
13	D	V	

M593 PENDING CHANGES

MODEL(S):- LS SERIES SUB-WOOFERS

#	PC#	PENDING CHANGE
1	PC	X
2	PC	X
3	PC	X
4	PC	X
5	PC	X
6	PC	X

*PLACE IMPLEMENTED CHANGES INTO BOARD HISTORY

Pcb Mech Top Assy M593V6.10
M593V6.10

StepAndRepeat - X3@3.700,Y2@4.625

BlankSize - 12.250"x10.450"

